



Kubota **BASE**

2.50 HE


10,3 kW (14 hp)

Technical Specifications

Power:	10,3 kW (14 hp)
Maximum RPM	3600
Displacement: ci (cc)	29.23 (479)
N° of cylinders	2 in line
Bore / Stroke: in (mm)	2.64 x 2.68 (67 x 68)
Compression Ratio	23 / 1
Injection	Indirect (E-TVCS)
Intake	Atmospherical
Cooling System	Heath Exchanger
Alternator	12 V 60 A
Instrument Panel	A 3
Transmission	Mechanical
Weight (incl trans): lb (kg)	202.8 (92)

Hose Diameters

Exhaust: in (mm)	1.57 (40)
Fuel: in (mm)	0.31 (8)
Sea Water: in (mm)	0.79 (20)
Engine Max Install. Angle	15°

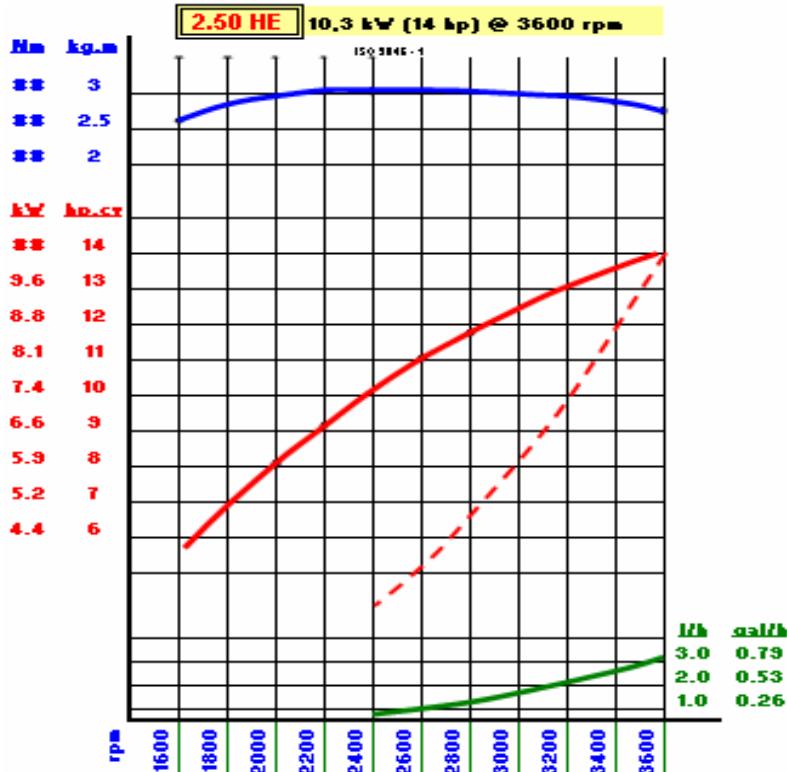

NANNI DIESEL recommends


MOTUL

2.50 HE

Line drawings

2.50 HE / TMC 40

Kubota BASE

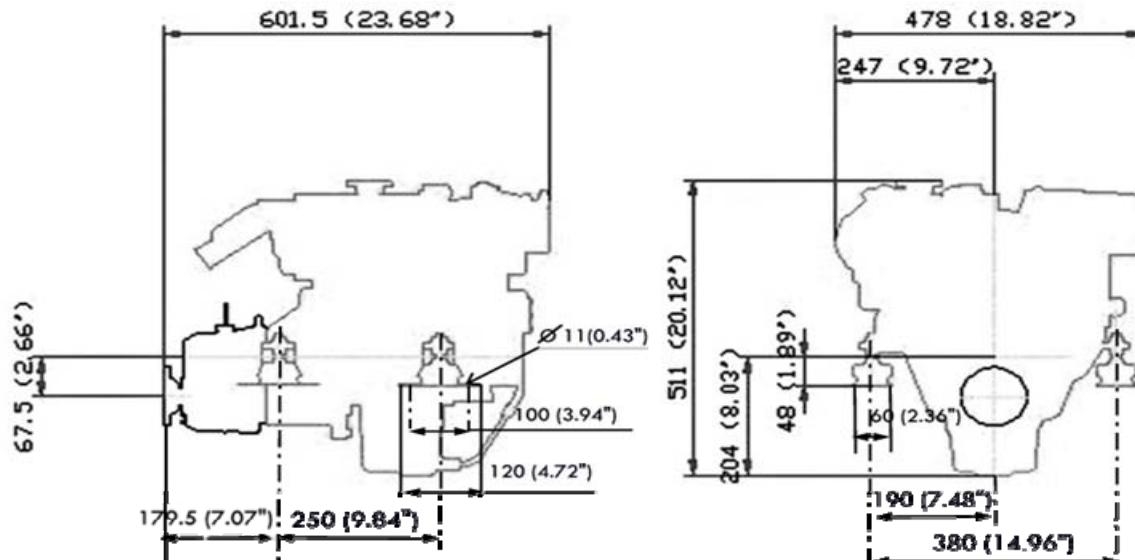

Standard Equipment

- A 3 Panel
- Tachometer / hourmeter
- Oil Pressure Warning Light & Audio Alarm
- Water T° Warning Light & Audio Alarm
- Battery Charge
- Glow Plugs
- Starter Key
- Mechanical Transmission
- Prearrangement for cable use
- Engine Mounts
- Owners Manual
- Warranty Certificate



(205 x 120 mm)

- Electrical Harness 13' (4m)
- Heat Exchanger
- Fresh Water Pump
- Thermostat
- Sea Water Pump
- Fresh Water Cooled Exhaust Manifold
- Exhaust Manifold With Water Injection
- In Line Injection Pump
- Fuel Pump
- Fuel Filter
- Oil Filter
- Electrical Wiring 12 V

Optional

- Bipolar Electrical Wiring
- Power Take-Off
- Coupling
- Propeller shaft
- Exhaust System
- Remote Control
- Sea Water Hoses
- Fuel Hoses
- Sea Water Filter
- Keel Cooling



Riverside Estate,
Brundall, Norwich, NR13 5PL
Tel: 01603 714077
Fax: 01603 712211
e-mail: sales@peachment.co.uk