

TOYOTA BASE

4.380 TDI

128,8 kW (175 hp)

Technical Specifications


Power	128,8 kW (175 hp)
Maximum RPM	3600 rpm
Displacement	181.94 ci (2982 cc)
N° of cylinders	4 in line
Bore / Stroke	3.78x4.05" (96x103 mm)
Compression Ratio	19,7 / 1
Injection	Indirect
Intake	Turbo intercooler
Cooling System	Heath Exchanger
Alternator	12 V 80 A
Instrument Panel	C 3 luxe
Transmission	Hydraulical
Weight (incl trans)	761.2 lb (346 kg)

Hose Diameters

Exhaust	3.50" (90 mm)
Fuel	0.40" (10 mm)
Sea Water	1.50" (38 mm)
Engine Max Install. Angle	15°

NANNI DIESEL recommends

MOTUL


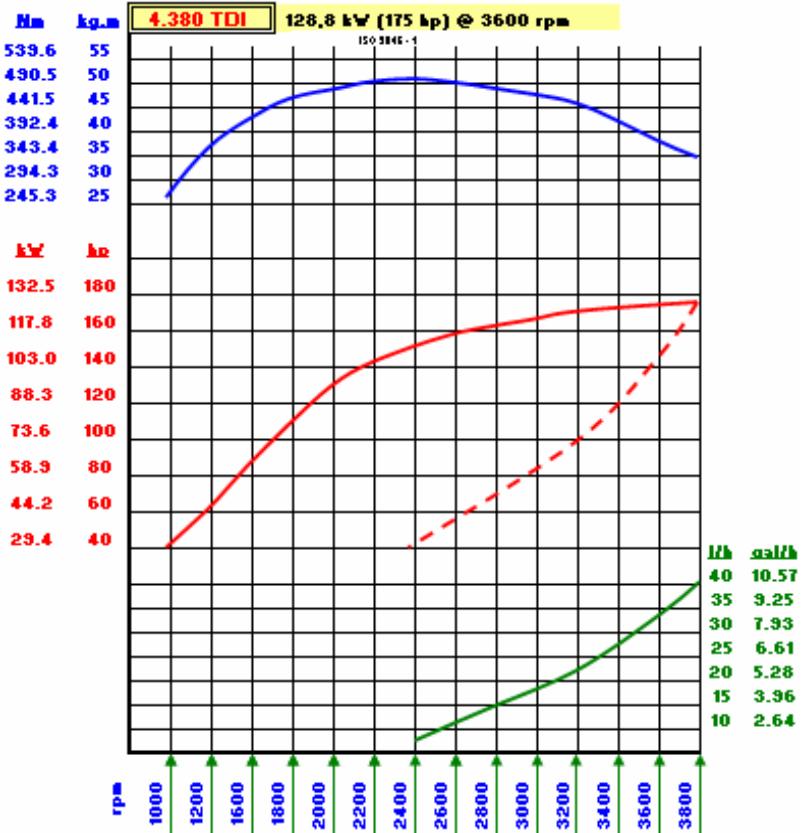


4.380 TDI

Kubota BASE

Line drawings

4.380 TDI / ZF 45A

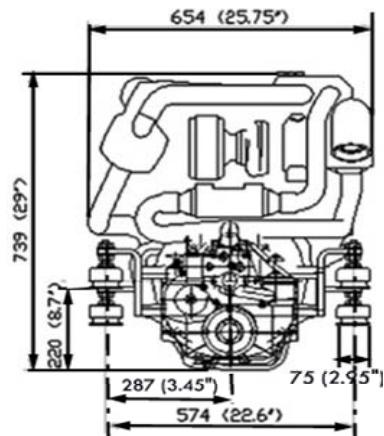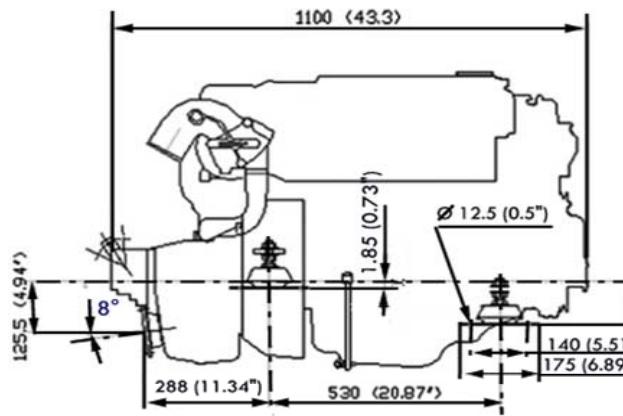

Standard Equipment

- C 3 luxe Instrument Panel
- Tachometer / hourmeter
- Oil Pressure Warning Light & Audio Alarm
- Water T° Warning Light & Audio Alarm
- Battery Charge
- Glow Plugs
- Water temperature indicator
- Battery charge indicator
- Oil pressure indicator
- Starter Key
- Hydraulical Transmission
- Prearrangement for cable use
- Engine Mounts
- Owners Manual
- Warranty Certificate



(270 x 188 mm)

10 x 7.4"

- Electrical Harness 13' (4m)
- Heat Exchanger
- Fresh Water Pump
- Thermostat
- Sea Water Pump
- Fresh Water Cooled Exhaust Manifold
- Exhaust Manifold With Water Injection
- Turbo Compressor
- In Line Injection Pump
- Fuel Pump
- Fuel Filter
- Oil Filter
- Extraction Oil Pump
- Electrical Wiring 12 V
- Electrical Stop

Optional

- Bipolar Electrical Wiring
- Coupling
- Propeller shaft
- Exhaust System
- Remote Control
- Sea Water Hoses
- Fuel Hoses
- Sea Water Filter
- Angled or V transmission
- Additional alternators
- Flying Bridge instrument Panel
- Trolling valve



Riverside Estate,
Brundall, Norwich, NR13 5PL
Tel: 01603 714077
Fax: 01603 712211
e-mail: sales@peachment.co.uk