




Electric Diaphragm Pumps



These pumps are excellent for shallow bilge boats where the water left behind by other types of pumps will slop from side to side. With the small size of inlet plumbing they are very effective as bilge pumps, removing all but the last drops of water. Diaphragm pumps can be run dry which removes the need to watch overboard outlets while the pump is running. The ability to self-prime means they can be mounted in an easily accessible high and dry location to simplify installation and improve serviceability. Most models in the line are supplied complete with a Pumpguard™ strainer to protect the pumps from bilge debris.

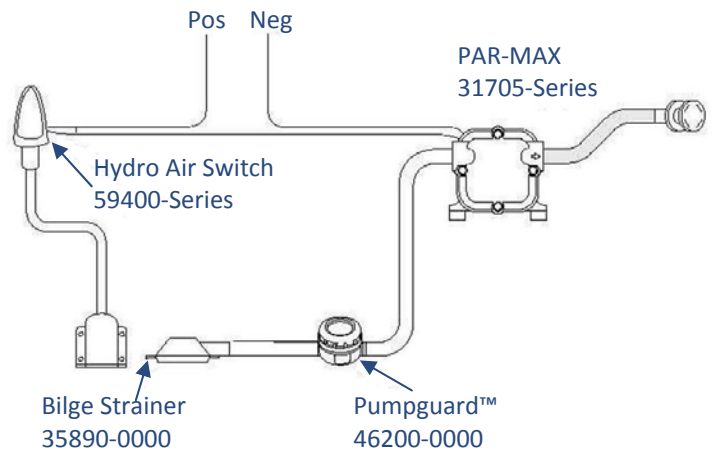

Example of an Electric Diaphragm Pump

More models available

PAR-MAX 4 (31705)



New generation, continuous rated bilge pump with waterproof coating for harsh environments.

- 258 uspg (978 lph) open flow output.
- Self-priming up to 10ft (3m) allows mounting above wet bilges.
- Diaphragm design allows extended dry running.
- Complete with Pumpguard™ strainer.
- Complies with USCG 183.410 and ISO 8846 MARINE (Ignition protection).
- Complies with ISO 8849 MARINE (Bilge Pump Standard_
- **Fitting:** Connections for 3/4" - 19mm ID hose.
- **Weight:** 5 1/2lb (2.5kg)
- **Size:** 5 1/4" wide x 5 3/4" high x 7 1/2" deep (13cm x 15cm x 19cm)



UK Distributors for Nanni Diesel & suppliers of marine equipment
01603 714077—info@peachment.co.uk—www.peachment.co.uk

